




1. Please check whether the spare parts are complete after opening the product package. If there is any defect, please contact the seller immediately.
2. The installation size of the purchased faucet should match the installation size of the embedded water inlet pipe.
3. The main part of the faucet has been inspected and debugged by the factory. Please do not disassemble or assemble by yourself, as it may affect the performance.
4. The faucet connected to the cold-hot water pipe must pay special attention to: hot water on the left, cold water on the right. If the connection is wrong, it will be the opposite of the red and blue identifier on the handle.
5. Before install the faucet, please be sure to remove impurities and dirt in the embedded pipe to avoid blockage and affect the water function.
6. After installation, turn on the water supply, and then check whether the connections are tightly connected to ensure that there is no leakage.
7. The internal structure of the faucet contains silicone and other high-temperature components that can not be used under high temperature conditions, please do not use in water temperature of more than 90° for a long time.
8. Applicable water pressure: 0.05Mpa-0.75Mpa



Installation requirements: Prebury before placing tiles




Test water pressure: 10KG (1.0Mpa)

PPR water pipe requirements: water inlet pipe 1/2 or 3/4 inch, water outlet pipe 1/2 inch(self-purchase)

Water pressure: ≥ 2.0KG (0.20Mpa)

Water pressure in ordinary residential areas can reach 3KG (0.3Mpa)

Applicable water heater: gas water heater, storage water heater, air energy water heater, solar water heater

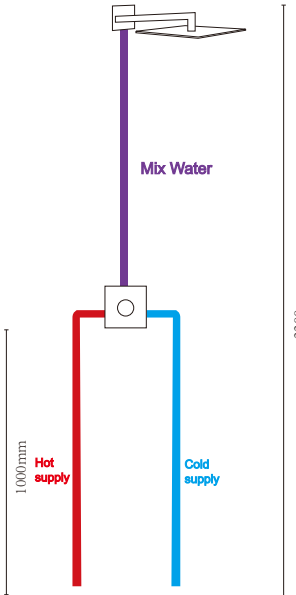

Installation instructions of 2 function concealed shower faucet

Installation requirements: Prebury before placing tiles





Test water pressure: 10KG (1.0Mpa)

PPR water pipe requirements: water inlet pipe 1/2 or 3/4 inch, water outlet pipe 1/2 inch (self-purchase)

Water pressure: ≥ 2.0KG (0.20Mpa)

Water pressure in ordinary residential areas can reach 3KG (0.3Mpa)

Applicable water heater: gas water heater, storage water heater, air energy water heater, solar water heater

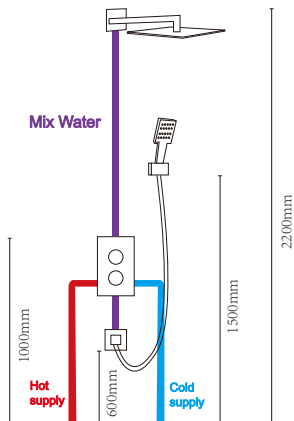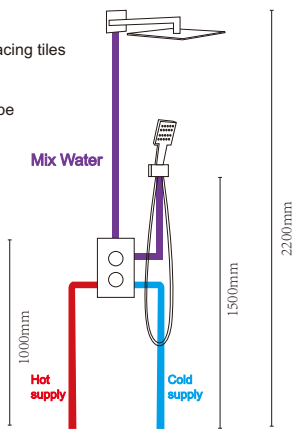

Installation instructions of 3 function concealed shower faucet

Installation requirements: Prebury before placing tiles

Test water pressure: 10KG (1.0Mpa)

PPR water pipe requirements: water inlet pipe 1/2 or 3/4 inch, water outlet pipe 1/2 inch(self-purchase)

Water pressure: ≥ 2.0KG (0.20Mpa)

Water pressure in ordinary residential areas can reach 3KG (0.3Mpa)

Applicable water heater: gas water heater, storage water heater, air energy water heater, solar water heater

