



Special Features:

Silent Drawer System

Modul Box Assembly Instruction

- Length:270,300,350,400,450,500,550mm.
- The drawer side-board is 203mm high.


 Drawer width can be designed freely with automatic error adjustment.
- Hidden full pullout silencing sliding skid can bear 35kg and enjoys excellent stability and quite and smooth sliding performance.
- Newly-designed built-in damper is free from reinstallation and ensures soft and smooth drawer movements. Quick installation and dismantle.

550mm	500mm	450mm	400mm	350mm	300mm	270mm	Basic length
524mm	474mm	424mm	374mm	324mm	274 mm	244mm	Internally usable drawer depth
555mm	505mm	455mm	$405 \mathrm{mm}$	355mm	305mm	275mm	Minimum installation depth of drawer
225mm	225mm	225mm	225mm	225mm	225mm	225mm	Minimum installation height






Front panel height adjustment : ±2mm



Mounting the drawer



Function of the damper

2 Back panel height= 183MM Back panel width=Inside Cabinet Width-87±0.5


Basic length:270/300/350/400/450/500/550

1 Bottom panel width=Inside Cabinet Width-75±0.5 Bottom panel length=Runner length-10MM

LW:Inside Cabinet Width


Technology pivot:
Bottom and Back Panel Measurement
16MM Density Panel

Installing the drawer





Front fixing brackets mounting


B Side overlay(user-defined)














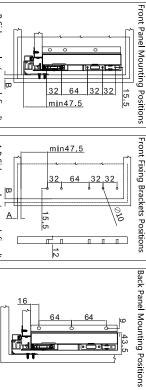

64 min47.5



